SIEMENS

Data sheet 3RF2310-1BA04



Solid-state contactor 1-phase 3RF2 AC 15 / 6 A / 40 $^{\circ}\text{C}$ 48-460 V / 24 V DC Instantaneous switching

| product brand name | SIRIUS | | |
|--|-------------------------|--|--|
| product designation | solid-state contactor | | |
| design of the product | single-phase | | |
| product type designation | 3RF23 | | |
| manufacturer's article number | | | |
| _1 of the accessories that can be ordered | 3RF2900-3PA88 | | |
| _2 of the accessories that can be ordered | 3RF2920-0HA16 | | |
| _3 of the accessories that can be ordered | 3RF2900-0EA18 | | |
| _4 of the accessories that can be ordered | 3RF2920-0GA16 | | |
| _5 of the accessories that can be ordered | 3RF2920-0FA08 | | |
| product designation | | | |
| _1 of the accessories that can be ordered | terminal cover | | |
| _2 of the accessories that can be ordered | power regulator | | |
| _3 of the accessories that can be ordered | converter | | |
| _4 of the accessories that can be ordered | load monitoring | | |
| _5 of the accessories that can be ordered | load monitoring, basis | | |
| General technical data | | | |
| product function | instantaneous switching | | |
| power loss [W] for rated value of the current at AC in hot operating state | 11 W | | |
| per pole | 11 W | | |
| power loss [W] for rated value of the current without load current share typical | 0.4 W | | |
| insulation voltage rated value | 600 V | | |
| degree of pollution | 3 | | |
| type of voltage of the control supply voltage | DC | | |
| surge voltage resistance of main circuit rated value | 6 kV | | |
| shock resistance acc. to IEC 60068-2-27 | 15g / 11 ms | | |
| vibration resistance acc. to IEC 60068-2-6 | 2g | | |
| reference code acc. to IEC 81346-2 | Q | | |
| Substance Prohibitance (Date) | 28.05.2009 | | |
| Main circuit | | | |
| number of poles for main current circuit | 1 | | |
| number of NO contacts for main contacts | 1 | | |
| number of NC contacts for main contacts | 0 | | |
| operating voltage at AC | | | |
| • at 50 Hz rated value | 48 460 V | | |
| at 60 Hz rated value | 48 460 V | | |
| operating frequency rated value | 50 60 Hz | | |
| operating range relative to the operating voltage at AC | | | |
| | | | |

| ● at 50 Hz | 40 506 V | | |
|--|---|--|--|
| ● at 60 Hz | 40 506 V | | |
| operational current | | | |
| at AC-51 rated value | 10.5 A | | |
| at AC-51 acc. to IEC 60947-4-3 | 7.5 A | | |
| acc. to UL 508 rated value | 6 A | | |
| operational current minimum | 100 mA | | |
| rate of voltage rise at the thyristor for main contacts | 500 V/μs | | |
| maximum permissible | | | |
| blocking voltage at the thyristor for main contacts | 1 200 V | | |
| maximum permissible | | | |
| reverse current of the thyristor | 10 mA | | |
| derating temperature | 40 °C | | |
| surge current resistance rated value | 200 A | | |
| I2t value maximum | 200 A ² ·s | | |
| Control circuit/ Control | | | |
| type of voltage of the control supply voltage | DC | | |
| control supply voltage 1 | | | |
| at DC rated value | 30 V | | |
| • at DC | 15 24 V | | |
| control supply voltage | | | |
| at DC initial value for signal <1> detection | 15 V | | |
| at DC full-scale value for signal<0> recognition | 5 V | | |
| control current at minimum control supply voltage | | | |
| • at DC | 13 mA | | |
| control current at DC rated value | 15 mA | | |
| ON-delay time | 1 ms | | |
| OFF-delay time | 1 ms; additionally max. one half-wave | | |
| Auxiliary circuit | · · · · · · · · · · · · · · · · · · · | | |
| number of NC contacts for auxiliary contacts | 0 | | |
| number of NO contacts for auxiliary contacts | 0 | | |
| number of CO contacts for auxiliary contacts | 0 | | |
| number of CO contacts for auxiliary contacts | 0 | | |
| Installation/manuting/dimensions | | | |
| Installation/ mounting/ dimensions | | | |
| fastening method | | | |
| fastening method • side-by-side mounting | Yes | | |
| fastening method • side-by-side mounting height | 95 mm | | |
| fastening method | 95 mm 22.5 mm | | |
| fastening method • side-by-side mounting height | 95 mm | | |
| fastening method | 95 mm 22.5 mm | | |
| fastening method • side-by-side mounting height width depth | 95 mm 22.5 mm | | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals | 95 mm 22.5 mm | | |
| fastening method | 95 mm 22.5 mm 88 mm | | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit | 95 mm 22.5 mm 88 mm screw-type terminals | | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit | 95 mm 22.5 mm 88 mm screw-type terminals | | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections | 95 mm 22.5 mm 88 mm screw-type terminals | | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts | 95 mm 22.5 mm 88 mm screw-type terminals screw-type terminals | | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid | 95 mm 22.5 mm 88 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) | | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing | 95 mm 22.5 mm 88 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² | | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main | 95 mm 22.5 mm 88 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² | | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts | 95 mm 22.5 mm 88 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) | | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded | 95 mm 22.5 mm 88 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² | | |
| fastening method • side-by-side mounting height width depth Connections/ Terminals type of electrical connection • for main current circuit • for auxiliary and control circuit type of connectable conductor cross-sections • for main contacts — solid — finely stranded with core end processing • at AWG cables for main contacts connectable conductor cross-section for main contacts solid or stranded • finely stranded with core end processing | 95 mm 22.5 mm 88 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² | | |
| fastening method | 95 mm 22.5 mm 88 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² | | |
| fastening method | 95 mm 22.5 mm 88 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) | | |
| fastening method | 95 mm 22.5 mm 88 mm screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) | | |
| fastening method | 95 mm 22.5 mm 88 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) | | |
| fastening method | 95 mm 22.5 mm 88 mm screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) | | |
| fastening method | 95 mm 22.5 mm 88 mm screw-type terminals screw-type terminals 2x (1.5 2.5 mm²), 2x (2.5 6 mm²) 2x (1 2.5 mm²), 2x (2.5 6 mm²), 1x 10 mm² 2x (14 10) 1.5 6 mm² 1 10 mm² 1x (0.5 2.5 mm²), 2x (0.5 1.0 mm²) 1x (AWG 20 12) | | |

| for main contacts with screw-type terminals | 2 2.5 N·m | | | |
|---|--|---------------------------|-------------------|--|
| for auxiliary and control contacts with screw-type | | | | |
| terminals | 0.5 0.6 N·m | | | |
| tightening torque [lbf·in] | | | | |
| for main contacts with screw-type terminals | 18 22 lbf·in | | | |
| for auxiliary and control contacts with screw-type | 4.5 5.3 lbf·in | | | |
| terminals | | | | |
| design of the thread of the connection screw | | | | |
| • for main contacts | M4 | | | |
| of the auxiliary and control contacts | M3 | | | |
| stripped length of the cable | 7 | | | |
| for main contacts for applications and control contacts | 7 mm | | | |
| for auxiliary and control contacts | 7 mm | | | |
| Safety related data | IDOO | | | |
| protection class IP on the front acc. to IEC 60529 | IP20 | | | |
| touch protection on the front acc. to IEC 60529 | finger-safe, for vertical co | ntact from the front | | |
| Ambient conditions | | | | |
| installation altitude at height above sea level maximum | 1 000 m | | | |
| ambient temperature | | | | |
| during operation | -25 +60 °C | | | |
| during storage | -55 +80 °C | | | |
| Electromagnetic compatibility | | | | |
| conducted interference | | | | |
| • due to burst acc. to IEC 61000-4-4 | 2 kV / 5 kHz behavior criterion 2 | | | |
| • due to conductor-earth surge acc. to IEC 61000-4-5 | 2 kV behavior criterion 2 | | | |
| due to conductor-conductor surge acc. to IEC 61000-4-5 | 1 kV behavior criterion 2 | | | |
| due to high-frequency radiation acc. to IEC 61000- 4-6 | 140 dBuV in the frequency range 0.15 80 MHz, behavior criterion 1 | | | |
| field-based interference acc. to IEC 61000-4-3 | 80 MHz 1 GHz 10 V/m, behavior criterion 1 | | | |
| electrostatic discharge acc. to IEC 61000-4-2 | 4 kV contact discharging / 8 kV air discharging, behavior criterion 2 | | | |
| conducted HF interference emissions acc. to CISPR11 | Class A for industrial environment | | | |
| field-bound HF interference emission acc. to CISPR11 | Class B for the domestic, | business and commercia | l environments | |
| Short-circuit protection, design of the fuse link | | | | |
| manufacturer's article number | | | | |
| of gS fuse for semiconductor protection at NH design usable | <u>3NE1813-0</u> | | | |
| of full range R fuse link for semiconductor protection at cylindrical design usable | <u>5SE1316</u> | | | |
| of back-up R fuse link for semiconductor protection at NH design usable | 3NE8015-1 | | | |
| of back-up R fuse link for semiconductor protection at cylindrical design 10 x 38 mm usable | <u>3NC1016</u> | | | |
| of back-up R fuse link for semiconductor protection at cylindrical design 14 x 51 mm usable | 3NC1420 | | | |
| of back-up R fuse link for semiconductor protection at cylindrical design 22 x 58 mm usable | 3NC2220 | | | |
| manufacturer's article number of the gG fuse | | | | |
| at NH design usable | 3NA6801 | 3NA6801 | | |
| • at cylindrical design 10 x 38 mm usable | 3NW6001-1; These fuses have a smaller rated current than the | | | |
| • at cylindrical design 14 x 51 mm usable | semiconductor relays 3NW6101-1; These fuses have a smaller rated current than the | | | |
| | semiconductor relays | | | |
| manufacturer's article number | E0E0000 The | | | |
| of NEOZED fuse usable | 5SE2306; These fuses have a smaller rated current than the semiconductor relays | | | |
| Certificates/ approvals | Someon du de la companya de la compa | | | |
| General Product Approval | EMC | Declaration of Conformity | Test Certificates | |
| | | | | |











Type Test Certificates/Test Report

Test Certificates

other

Railway

Special Test Certificate

Confirmation



Vibration and Shock

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RF2310-1BA04


Cax online generator


http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RF2310-1BA04


 ${\bf Service \& Support~(Manuals,~Certificates,~Characteristics,~FAQs,...)}$

https://support.industry.siemens.com/cs/ww/en/ps/3RF2310-1BA04

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RF2310-1BA04&lang=en

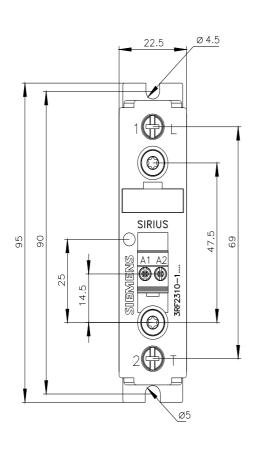

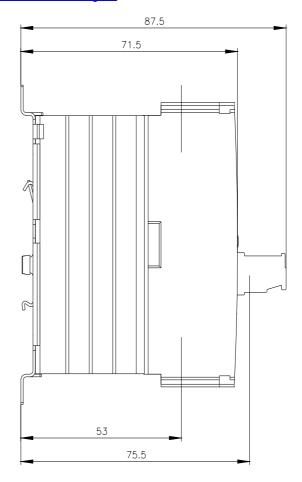

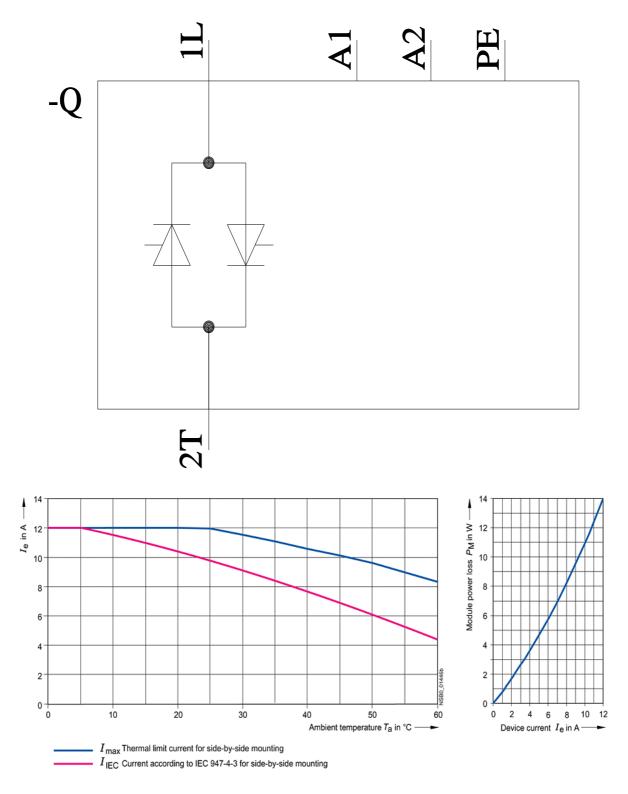

last modified: 1/12/2022 🖸