## SIEMENS

Product data sheet

## CONTACTOR, AC-3 4KW/400V, AC 24V, 50HZ, 3-POLE, SIZE S0, SCREW CONNECTION

General technical data:		
product brand name		SIRIUS
Size of the contactor		S0
Protection class IP / on the front		IP20
Degree of pollution		3
Installation altitude / at a height over sea level / maximum	m	2,000
Ambient temperature / during operating	°C	-25 +60
Mechanical operating cycles as operating time		
• of the contactor / typical		10,000,000
<ul> <li>of the contactor with added auxiliary switch block / typical</li> </ul>		10,000,000
<ul> <li>of the contactor with added electronics-compatible auxiliary switch block / typical</li> </ul>		5,000,000
Main circuit:		
Number of NC contacts / for main contacts		0
Number of NO contacts / for main contacts		3
Operational current		
• at AC-1 / at 400 V		
• at 40 °C ambient temperature / rated value	А	40
• at 60 °C ambient temperature / rated value	А	35
• at AC-3 / at 400 V / rated value	А	9
• at AC-4 / at 400 V / rated value	А	8.5
• with 1 current path / at DC-1		
• at 24 V / rated value	А	35
• at 110 V / rated value	А	4.5
• with 2 current paths in series / at DC-1		
• at 24 V / rated value	А	35
• at 110 V / rated value	А	35
• with 3 current paths in series / at DC-1		
• at 24 V / rated value	А	35
• at 110 V / rated value	А	35
• with 1 current path / at DC-3 / at DC-5		
• at 24 V / rated value	А	20

• at 110 V / rated value	А	2.5
• with 2 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	А	35
• at 110 V / rated value	А	15
• with 3 current paths in series / at DC-3 / at DC-5		
• at 24 V / rated value	А	35
• at 110 V / rated value	А	35
Service power		
• at AC-2 / at 400 V / rated value	kW	4
• at AC-3 / at 400 V / rated value	kW	4
• at AC-4 / at 400 V / rated value	W	4,000

Control circuit:		
Type of voltage / of the controlled supply voltage		AC
Operating range factor control supply voltage rated value / of the magnet coil		
• at 50 Hz		
• for AC		0.8 1.1
Apparent pull-in power / of the solenoid / for AC	V·A	61
Apparent holding power / of the solenoid / for AC	V·A	7.8
Inductive power factor / with the pull-in power of the coil		0.82
Inductive power factor / with the pull-in power of the coil		0.24

Auxiliary circuit:				
Contact reliability / of the auxiliary contacts		1 faulty switching per 100 million (17 V, 1 mA)		
Number of NC contacts / for auxiliary contacts / instantaneous switching	_	0		
Number of NO contacts / for auxiliary contacts / instantaneous switching		0		
Operating current / of the auxiliary contacts				
• at AC-12 / maximum	А	10		
• at AC-15				
• at 230 V	А	6		
• at 400 V	А	3		
• at DC-12				
• at 60 V	А	6		
• at 110 V	А	3		
• at 220 V	А	1		
• at DC-13				
• at 24 V	А	10		
• at 60 V	А	2		

• at 110 V	А	1
• at 220 V	А	0.3
Short-circuit:		
Design of the fuse link		
• for short-circuit protection of the auxiliary switch / required		fuse gL/gG: 10 A
<ul> <li>for short-circuit protection of the main circuit</li> </ul>		
<ul> <li>with type of assignment 1 / required</li> </ul>		fuse gL/gG: 63 A
• at type of coordination 2 / required		fuse gL/gG: 25 A
Installation/mounting/dimensions:		
Type of mounting		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
series installation		Yes
Width	mm	45
Height	mm	85
Depth	mm	91
Depth Distance, to be maintained, to earthed part / sidewards	mm	91 6
•	_	
Distance, to be maintained, to earthed part / sidewards	_	
Distance, to be maintained, to earthed part / sidewards Connection type:	_	
Distance, to be maintained, to earthed part / sidewards Connection type: Design of the electrical connection	_	6
Distance, to be maintained, to earthed part / sidewards Connection type: Design of the electrical connection • for main current circuit	_	6 screw-type terminals
Distance, to be maintained, to earthed part / sidewards Connection type: Design of the electrical connection  • for main current circuit • for auxiliary and control current circuit	_	6 screw-type terminals
Distance, to be maintained, to earthed part / sidewards Connection type: Design of the electrical connection • for main current circuit • for auxiliary and control current circuit Type of the connectable conductor cross-section	_	6 screw-type terminals
Distance, to be maintained, to earthed part / sidewards Connection type: Design of the electrical connection • for main current circuit • for auxiliary and control current circuit Type of the connectable conductor cross-section • for main contacts	_	6 screw-type terminals screw-type terminals
Distance, to be maintained, to earthed part / sidewards Connection type: Design of the electrical connection • for main current circuit • for auxiliary and control current circuit Type of the connectable conductor cross-section • for main contacts • solid	_	6 screw-type terminals screw-type terminals
Distance, to be maintained, to earthed part / sidewards Connection type: Design of the electrical connection • for main current circuit • for auxiliary and control current circuit Type of the connectable conductor cross-section • for main contacts • solid • finely stranded	_	6 screw-type terminals screw-type terminals 2x (1 2.5 mm <sup>2</sup> ), 2x (2.5 6 mm <sup>2</sup> ), max. 2x 10 mm <sup>2</sup>
Distance, to be maintained, to earthed part / sidewards Connection type: Design of the electrical connection • for main current circuit • for auxiliary and control current circuit Type of the connectable conductor cross-section • for main contacts • solid • finely stranded • with conductor end processing	_	6         screw-type terminals         screw-type terminals         2x (1 2.5 mm²), 2x (2.5 6 mm²), max. 2x 10 mm²         2x (1 2.5 mm²), 2x (2.5 6 mm²)
Distance, to be maintained, to earthed part / sidewards Connection type: Design of the electrical connection • for main current circuit • for auxiliary and control current circuit Type of the connectable conductor cross-section • for main contacts • solid • finely stranded • with conductor end processing • for AWG conductors / for main contacts	_	6         screw-type terminals         screw-type terminals         2x (1 2.5 mm²), 2x (2.5 6 mm²), max. 2x 10 mm²         2x (1 2.5 mm²), 2x (2.5 6 mm²)
Distance, to be maintained, to earthed part / sidewards Connection type: Design of the electrical connection • for main current circuit • for auxiliary and control current circuit Type of the connectable conductor cross-section • for main contacts • solid • finely stranded • with conductor end processing • for AWG conductors / for main contacts • for auxiliary contacts	_	6         screw-type terminals         screw-type terminals         2x (1 2.5 mm²), 2x (2.5 6 mm²), max. 2x 10 mm²         2x (1 2.5 mm²), 2x (2.5 6 mm²), max. 2x 10 mm²         2x (20 16), 2x (18 14), 1x 12         2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), max. 2x
Distance, to be maintained, to earthed part / sidewards Connection type: Design of the electrical connection • for main current circuit • for auxiliary and control current circuit Type of the connectable conductor cross-section • for main contacts • solid • finely stranded • with conductor end processing • for AWG conductors / for main contacts • for auxiliary contacts • solid	_	6         screw-type terminals         screw-type terminals         2x (1 2.5 mm²), 2x (2.5 6 mm²), max. 2x 10 mm²         2x (1 2.5 mm²), 2x (2.5 6 mm²), max. 2x 10 mm²         2x (20 16), 2x (18 14), 1x 12         2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²), max. 2x

Certificates/approvals:

General Product A	Approval				Functional Safety / Safety of Machinery
	(SA)	GOST			Type Examination
Declaration of Conformity	Test Certificates				
CE EG-Konf.	Special Test Certificate	<u>Type Test</u> <u>Certificates/Test</u> <u>Report</u>			
Shipping Approva	ı				
ABS	B U REAU VERITAS	DINV DINV	GL	Lloyd's Kegister LRS	RMRS
other					
Confirmation	other	Environmental Confirmations			
Further information	on:				

Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs

## Industry Mall (Online ordering system)


http://www.siemens.com/industrial-controls/mall


## Cax online generator:


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WW/view/en/3RT1023-1AB00/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3RT1023-1AB00







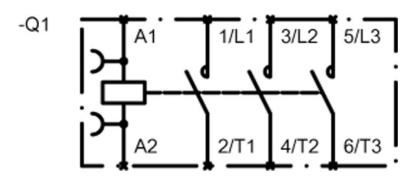

last change:

Feb 4, 2013