
## 700HLT1U2

Allen-Bradley 700-HL Interface Relay 6A 1CO SPDT 220V to 240VAC DC Standard Silver Contacts



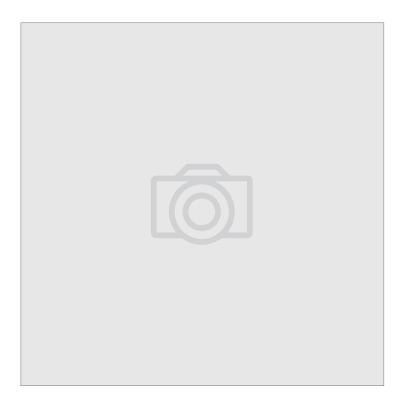

Component type	Switching relay
Range	700HLT
Model	N/A
Product status	Existing

ELECTRICAL	Nominal current	6.0 A
	Nominal voltage AC	250.0 V
	Number of contacts as change-over contact	1.0
	Rated switching power at AC-1	1500.0 VA
	Rated switching power at AC-15, 230V	300.0 VA
	Breaking capacity at DC-1, 30V	6.0 A
	Voltage type for actuating	AC/DC
	Rated control supply voltage Us at AC 50HZ	220240 V
	Rated control supply voltage Us at DC	220 - 240 V
	Rated control supply voltage Us at AC 60HZ	220240 V
	With LED indication	Yes
	Type of electric connection	Screw connection
	Electrical life at Un, In (service cycles)	100000.0 cycles
	Operating voltage	204264 V
CONSTRUCTION	Material contact	Silver tin-oxide
	Complete with socket	Yes
	Suitable for plug-in socket mounting	Yes
	Degree of protection (IP)	IP20
MECHANICAL	Mechanical life (service cycles)	1.0E7 cycles
DIMENSIONS	Width	6.2 mm
	Height	88.0 mm
	Depth	76.0 mm
	· · · · · · · · · · · · · · · · · · ·	