


95.95.3

Approvals
(according to type):



095.91.3






060.48

Screw (Box clamp) terminal socket panel or 35 mm rail mount		95.93.3 (blue)	95.93.30 (black)	95.95.3 (blue)	95.95.30 (black)
For relay type		40.31		40.51, 40.52, 40.61, 40.62	
Accessories					
Metal retaining clip		095.71			
Plastic retaining and release clip (supplied with socket - packaging code SPA)		095.91.3	095.91.30	095.91.3	095.91.30
8-way jumper link		095.08	095.08.0	095.08	095.08.0
Identification tag		095.00.4			
Modules (see table below)		99.80			
Sheet of marker tags for plastic retaining and release clip 095.91.3 and for marker tag holder 097.00, 48 tags, 6 x 12 mm, for CEMBRE thermal transfer printers		060.48			
Technical data					
Rated values		10 A - 250 V*			
Dielectric strength between coil and contacts (1.2/50 µs)		6 kV			
Protection category		IP 20			
Ambient temperature	°C	-40...+70 (see diagram L95)			
Screw torque	Nm	0.5			
Wire strip length	mm	8			
Max. wire size for 95.93.3 and 95.95.3 sockets		solid wire		stranded wire	
	mm ²	1 x 6 / 2 x 2.5		1 x 4 / 2 x 2.5	
	AWG	1 x 10 / 2 x 14		1 x 12 / 2 x 14	


* For currents > 10 A, contact terminals must be connected in parallel (21 with 11, 24 with 14, 22 with 12).
With the relay 40.51 the change-over contact will be 21-12-14.

L 95 - Total socket current v ambient temperature

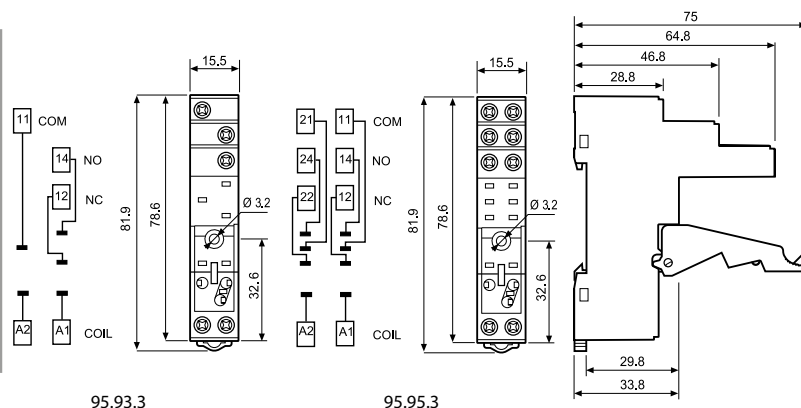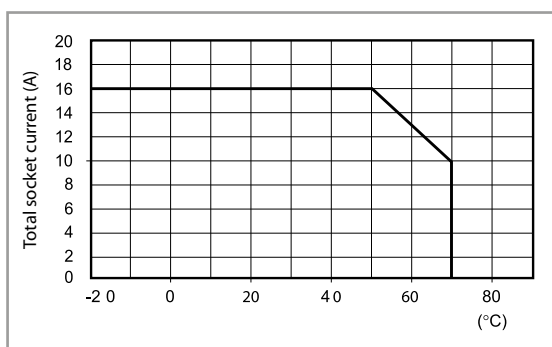

095.08

8-way jumper link for 95.93.3 and 95.95.3 sockets	095.08 (blue)	095.08.0 (black)
Rated values	10 A - 250 V	

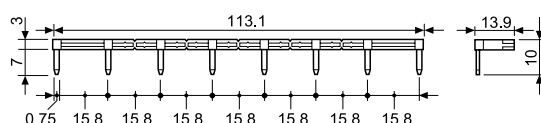

99.80 coil indication and EMC suppression modules for 95.93.3 and 95.95.3 sockets

	Blue*
Diode (+A1, standard polarity)	(6...220)V DC 99.80.3.000.00
LED	(6...24)V DC/AC 99.80.0.024.59
LED	(28...60)V DC/AC 99.80.0.060.59
LED	(110...240)V DC/AC 99.80.0.230.59
LED + Diode (+A1, standard polarity)	(6...24)V DC 99.80.9.024.99
LED + Diode (+A1, standard polarity)	(28...60)V DC 99.80.9.060.99
LED + Diode (+A1, standard polarity)	(110...220)V DC 99.80.9.220.99
LED + Varistor	(6...24)V DC/AC 99.80.0.024.98
LED + Varistor	(28...60)V DC/AC 99.80.0.060.98
LED + Varistor	(110...240)V DC/AC 99.80.0.230.98
RC circuit	(6...24)V DC/AC 99.80.0.024.09
RC circuit	(28...60)V DC/AC 99.80.0.060.09
RC circuit	(110...240)V DC/AC 99.80.0.230.09
Residual current by-pass	(110...240)V AC 99.80.8.230.07

99.80

Approvals
(according to type):



* Modules in Black housing are available on request.

Green LED is standard.
Red LED available on request.