


# Standard Rectifier Module

$$\begin{aligned} V_{RRM} &= 2 \times 1400 \text{ V} \\ I_{FAV} &= 224 \text{ A} \\ V_F &= 1.07 \text{ V} \end{aligned}$$

Phase leg


Part number

**MDD200-14N1**

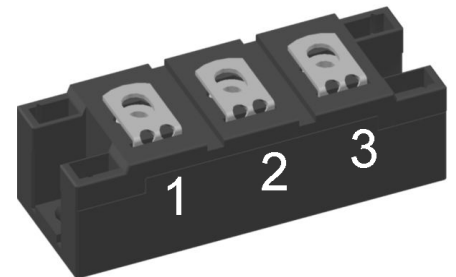

Backside: isolated

 E72873



## Features / Advantages:

- Package with DCB ceramic
- Improved temperature and power cycling
- Planar passivated chips
- Very low forward voltage drop
- Very low leakage current

## Applications:

- Diode for main rectification
- For single and three phase bridge configurations
- Supplies for DC power equipment
- Input rectifiers for PWM inverter
- Battery DC power supplies
- Field supply for DC motors

## Package: Y4

- Isolation Voltage: 3600 V~
- Industry standard outline
- RoHS compliant
- Height: 30 mm
- Base plate: DCB ceramic
- Reduced weight
- Advanced power cycling

## Terms .Conditions of usage:

The data contained in this product data sheet is exclusively intended for technically trained staff. The user will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to his application. The specifications of our components may not be considered as an assurance of component characteristics. The information in the valid application- and assembly notes must be considered. Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of your product, please contact your local sales office.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact your local sales office.

Should you intend to use the product in aviation, in health or life endangering or life support applications, please notify. For any such application we urgently recommend


- to perform joint risk and quality assessments;

- the conclusion of quality agreements;

- to establish joint measures of an ongoing product survey, and that we may make delivery dependent on the realization of any such measures.

| Rectifier    |                                              |                                                   |                                | Ratings                        |      |       |                   |
|--------------|----------------------------------------------|---------------------------------------------------|--------------------------------|--------------------------------|------|-------|-------------------|
| Symbol       | Definition                                   | Conditions                                        |                                | min.                           | typ. | max.  | Unit              |
| $V_{RSM}$    | max. non-repetitive reverse blocking voltage | $T_{VJ} = 25^{\circ}\text{C}$                     |                                |                                |      | 1500  | V                 |
| $V_{RRM}$    | max. repetitive reverse blocking voltage     | $T_{VJ} = 25^{\circ}\text{C}$                     |                                |                                |      | 1400  | V                 |
| $I_R$        | reverse current                              | $V_R = 1400\text{ V}$                             | $T_{VJ} = 25^{\circ}\text{C}$  |                                |      | 1     | mA                |
|              |                                              | $V_R = 1400\text{ V}$                             | $T_{VJ} = 150^{\circ}\text{C}$ |                                |      | 20    | mA                |
| $V_F$        | forward voltage drop                         | $I_F = 300\text{ A}$                              | $T_{VJ} = 25^{\circ}\text{C}$  |                                |      | 1.16  | V                 |
|              |                                              | $I_F = 600\text{ A}$                              |                                |                                |      | 1.39  | V                 |
|              |                                              | $I_F = 300\text{ A}$                              | $T_{VJ} = 125^{\circ}\text{C}$ |                                |      | 1.07  | V                 |
|              |                                              | $I_F = 600\text{ A}$                              |                                |                                |      | 1.36  | V                 |
| $I_{FAV}$    | average forward current                      | $T_C = 100^{\circ}\text{C}$                       | $T_{VJ} = 150^{\circ}\text{C}$ |                                |      | 224   | A                 |
| $I_{F(RMS)}$ | RMS forward current                          | 180° sine $d = 0.5$                               |                                |                                |      | 350   | A                 |
| $V_{F0}$     | threshold voltage                            | } for power loss calculation only                 |                                | $T_{VJ} = 150^{\circ}\text{C}$ |      | 0.80  | V                 |
| $r_F$        | slope resistance                             |                                                   |                                |                                |      | 0.6   | mΩ                |
| $R_{thJC}$   | thermal resistance junction to case          |                                                   |                                |                                |      | 0.13  | K/W               |
| $R_{thCH}$   | thermal resistance case to heatsink          |                                                   |                                |                                | 0.08 |       | K/W               |
| $P_{tot}$    | total power dissipation                      | $T_C = 25^{\circ}\text{C}$                        |                                |                                |      | 960   | W                 |
| $I_{FSM}$    | max. forward surge current                   | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 45^{\circ}\text{C}$  |                                |      | 10.5  | kA                |
|              |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$             |                                |      | 11.3  | kA                |
|              |                                              | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 150^{\circ}\text{C}$ |                                |      | 8.93  | kA                |
|              |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$             |                                |      | 9.64  | kA                |
| $I^2t$       | value for fusing                             | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 45^{\circ}\text{C}$  |                                |      | 551.3 | kA <sup>2</sup> s |
|              |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$             |                                |      | 535.0 | kA <sup>2</sup> s |
|              |                                              | $t = 10\text{ ms}; (50\text{ Hz}), \text{ sine}$  | $T_{VJ} = 150^{\circ}\text{C}$ |                                |      | 398.3 | kA <sup>2</sup> s |
|              |                                              | $t = 8,3\text{ ms}; (60\text{ Hz}), \text{ sine}$ | $V_R = 0\text{ V}$             |                                |      | 386.6 | kA <sup>2</sup> s |
| $C_J$        | junction capacitance                         | $V_R = 1100\text{ V}; f = 1\text{ MHz}$           |                                | $T_{VJ} = 25^{\circ}\text{C}$  | 230  |       | pF                |

| Package Y4           |                                                              |                      |                                         | Ratings |      |      |      |
|----------------------|--------------------------------------------------------------|----------------------|-----------------------------------------|---------|------|------|------|
| Symbol               | Definition                                                   | Conditions           |                                         | min.    | typ. | max. | Unit |
| I <sub>RMS</sub>     | RMS current                                                  | per terminal         |                                         |         |      | 300  | A    |
| T <sub>VJ</sub>      | virtual junction temperature                                 |                      |                                         | -40     |      | 150  | °C   |
| T <sub>op</sub>      | operation temperature                                        |                      |                                         | -40     |      | 125  | °C   |
| T <sub>stg</sub>     | storage temperature                                          |                      |                                         | -40     |      | 125  | °C   |
| Weight               |                                                              |                      |                                         |         | 150  |      | g    |
| M <sub>D</sub>       | mounting torque                                              |                      |                                         | 2.25    |      | 2.75 | Nm   |
| M <sub>T</sub>       | terminal torque                                              |                      |                                         | 4.5     |      | 5.5  | Nm   |
| d <sub>Spp/App</sub> | creepage distance on surface   striking distance through air | terminal to terminal | 14.0                                    | 10.0    |      |      | mm   |
| d <sub>Spb/Apb</sub> |                                                              | terminal to backside | 16.0                                    | 16.0    |      |      | mm   |
| V <sub>ISOL</sub>    | isolation voltage                                            | t = 1 second         | 50/60 Hz, RMS; I <sub>ISOL</sub> ≤ 1 mA | 3600    |      |      | V    |
|                      |                                                              | t = 1 minute         |                                         | 3000    |      |      | V    |

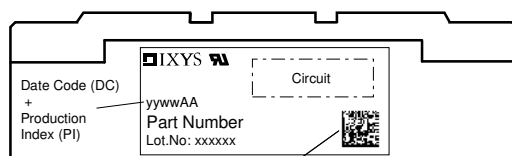


Data Matrix: part no. (1-19), DC + PI (20-25), lot.no.# (26-31), blank (32), serial no.# (33-36)

| Ordering | Ordering Number | Marking on Product | Delivery Mode | Quantity | Code No. |
|----------|-----------------|--------------------|---------------|----------|----------|
| Standard | MDD200-14N1     | MDD200-14N1        | Box           | 6        | 500215   |

### Equivalent Circuits for Simulation

\* on die level

$T_{VJ} = 150\text{ °C}$



Rectifier


|                    |                    |     |    |
|--------------------|--------------------|-----|----|
| $V_{0\text{ max}}$ | threshold voltage  | 0.8 | V  |
| $R_{0\text{ max}}$ | slope resistance * | 0.4 | mΩ |

## Outlines Y4





| Dim. | MIN<br>[mm] | MAX<br>[mm] | MIN<br>[inch] | MAX<br>[inch] |
|------|-------------|-------------|---------------|---------------|
| a    | 30.0        | 30.6        | 1.181         | 1.205         |
| b    | typ. 0.25   |             | typ. 0.010    |               |
| c    | 64.0        | 65.0        | 2.520         | 2.559         |
| d    | 6.5         | 7.0         | 0.256         | 0.275         |
| e    | 4.9         | 5.1         | 0.193         | 0.201         |
| h    | 93.5        | 94.5        | 3.681         | 3.720         |
| i    | 79.5        | 80.5        | 3.130         | 3.169         |
| k    | 33.4        | 34.0        | 1.315         | 1.339         |
| l    | 16.7        | 17.3        | 0.657         | 0.681         |
| m    | 22.7        | 23.3        | 0.894         | 0.917         |
| n    | 22.7        | 23.3        | 0.894         | 0.917         |
| o    | 14.0        | 15.0        | 0.551         | 0.591         |
| p    | typ. 10.5   |             | typ. 0.413    |               |

A (3:1)

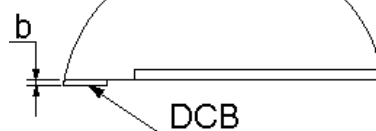

B-B (1:1)



## Rectifier

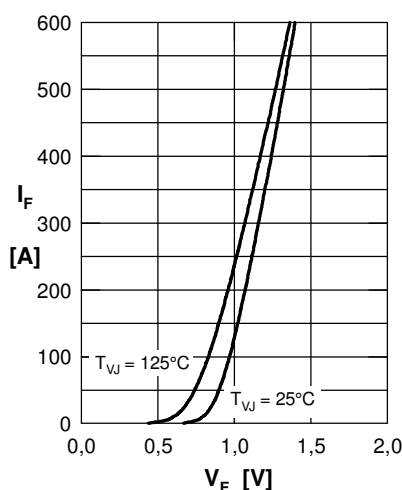


Fig. 1 Forward current versus voltage drop

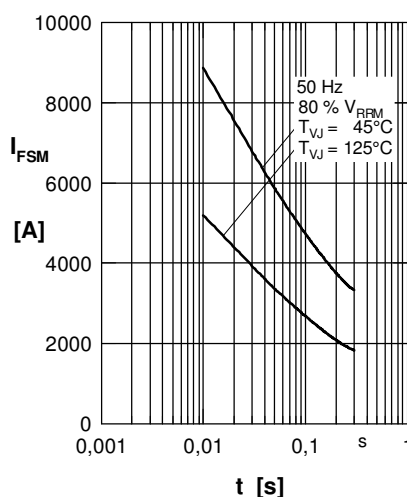


Fig. 2 Surge overload current  
 $I_{FSM}$ : Crest value,  $t$ : duration

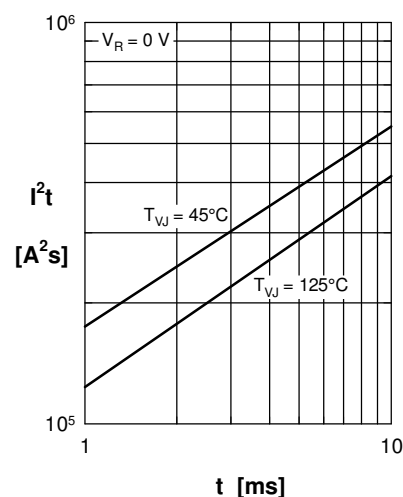


Fig. 3  $I^2t$  versus time (1-10 ms)

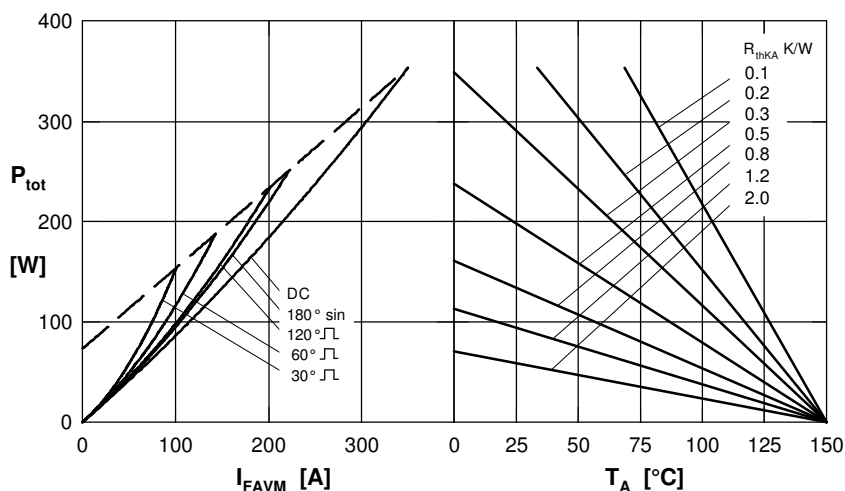


Fig. 4 Power dissipation versus forward current and ambient temperature (per diode)

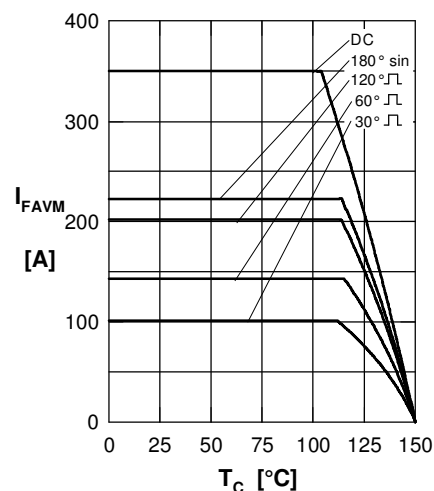


Fig. 5 Maximum forward current at case temperature

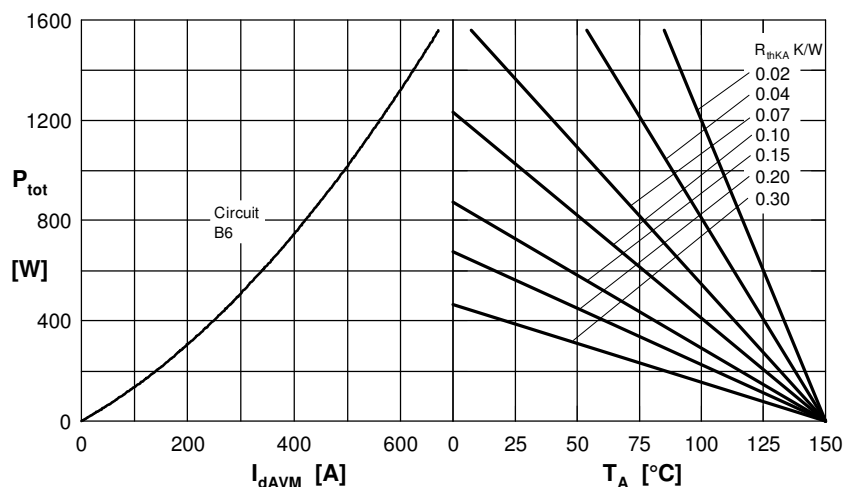


Fig. 6 Three phase rectifier bridge: Power dissipation versus direct output current and ambient temperature

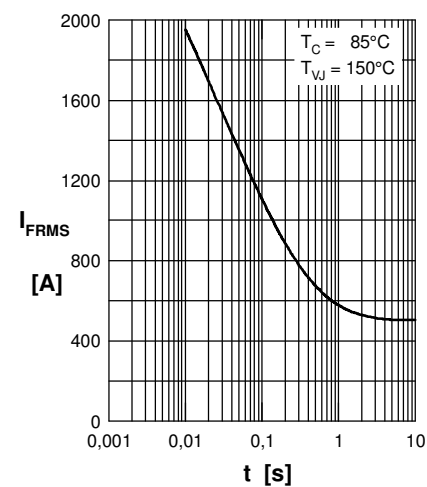
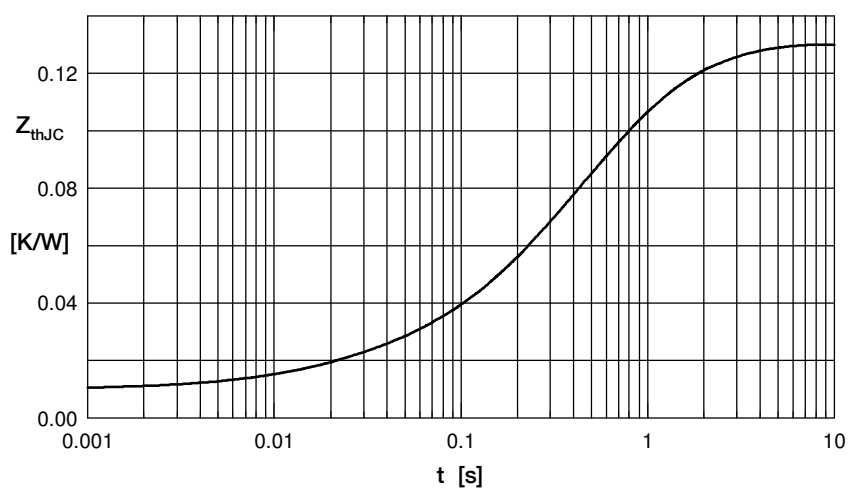


Fig. 7 Rated RMS current versus time (360° conduction)

## Rectifier

Constants for  $Z_{thJC}$  calculation:

| i | $R_{thi}$ [K/W] | $t_i$ [s] |
|---|-----------------|-----------|
| 1 | 0.0100          | 0.00014   |
| 2 | 0.0065          | 0.019     |
| 3 | 0.0250          | 0.180     |
| 4 | 0.0615          | 0.520     |
| 5 | 0.0270          | 1.600     |

Fig. 8 Transient thermal impedance junction to case