



CIRCUIT-BREAKER N-RELEASE 325 A,  
 SIZE S0, STARTER PROTECTION,  
 50 KA SCREW CONNECTION STANDARD BREAKING  
 CAPACITY

**General technical data:**

<b>product brand name</b>		SIRIUS
<b>product designation</b>		circuit breaker
<b>Size of the circuit-breaker</b>		S0
<b>Degree of pollution</b>		3
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Protection class IP / on the front</b>		IP20
<b>Ambient temperature</b>		
• during storage	°C	-50 ... +80
• during operating	°C	-20 ... +70
• during transport	°C	80 ... -50
<b>Resistance against shock</b>		25g / 11 ms
<b>Insulation voltage / rated value</b>	V	690
<b>Impulse voltage resistance / rated value</b>	V	6,000
<b>Active power loss / total / typical</b>	W	8
<b>Item designation</b>		
• according to DIN 40719 extendable after IEC 204-2 / according to IEC 750		Q
• according to DIN EN 61346-2		Q
<b>Mechanical operating cycles as operating time / of the main contacts / typical</b>		100,000

<b>Type of the driving mechanism / motor drive</b>		No
<b>Design of the operating mechanism</b>		selector switch
<b>Product function</b>		
• overload protection		No
• phase disturbance recognition		No
<b>Product component</b>		
• auxiliary switch		No
• undervoltage release mechanism		No
• trip indicator		No
<b>Product extension / optional / motor drive</b>		No

#### Main circuit:

<b>Number of poles / for main current circuit</b>		3
<b>type of voltage</b>		AC/DC
<b>Operating voltage / at AC-3 / rated value / maximum</b>	V	690
<b>Operating current / at AC-3 / at 400 V / rated value</b>	A	25
<b>Service power / at AC-3</b>		
• at 400 V / rated value	kW	11
<b>Frequency of operation / at AC-3 / according to IEC 60947-6-2 / maximum</b>	1/h	15
<b>Arrangement of electrical connectors / for main current circuit</b>		front side
<b>Adjustable response current</b>		
• of the non-delayed short-circuit release	A	325 ... 325
<b>Continuous current / rated value</b>	A	25
<b>Product extension / auxiliary switch</b>		Yes

#### Auxiliary circuit:

<b>Number of NC contacts / for auxiliary contacts / instantaneous switching</b>		0
<b>Number of NO contacts / for auxiliary contacts / instantaneous switching</b>		0
<b>Number of change-over switches / for auxiliary contacts</b>		0

#### Inputs/ Outputs:

<b>Number of digital inputs</b>		0
---------------------------------	--	---

#### Short-circuit:

<b>Breaking capacity limit short-circuit current (I<sub>cu</sub>)</b>		
• at 400 V / rated value	kA	50
• at 500 V / rated value	kA	10
• at 690 V / rated value	kA	4
<b>Design of the electrical connection / for auxiliary and control current circuit</b>		screw-type terminals

<b>Design of the overcurrent release and short-circuit release</b>		magnetic
<b>Installation/mounting/dimensions:</b>		
<b>Built in orientation</b>		any
<b>Type of mounting</b>		screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022
<b>Width</b>	mm	45
<b>Height</b>	mm	97
<b>Depth</b>	mm	96
<b>Distance, to be maintained, to the ranks assembly</b>		
• backwards	mm	0
• sideways	mm	0
<b>Product function / removable terminal for auxiliary and control circuit</b>		No

<b>Connections:</b>		
<b>Design of the electrical connection</b>		
• for main current circuit		screw-type terminals
<b>Type of the connectable conductor cross-section</b>		
• for main contacts		
• solid		2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )
• stranded		2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )
• finely stranded		
• with conductor end processing		2x (1 ... 2.5 mm <sup>2</sup> ), 2x (2.5 ... 6 mm <sup>2</sup> )
• for AWG conductors / for main contacts		2x (14 ... 10)
<b>Conductor cross section that can be connected / for main contacts</b>		
• solid	mm <sup>2</sup>	1 ... 6
• stranded	mm <sup>2</sup>	1 ... 6
• stranded wire		
• with conductor end processing	mm <sup>2</sup>	1 ... 6
<b>AWG number / as coded connectable conductor cross-section</b>		
• for main contacts		14 ... 10

**Certificates/approvals:**

General Product Approval

Test Certificates



[KETI](#)

[ROSTEST](#)



[Manufacturer](#)

Shipping Approval



other

[Manufacturer](#)

[other](#)

Safety:

Protection against electrical shock

finger-safe

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

CAX-Online-Generator




<http://www.siemens.com/cax>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RV1321-4DC10/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RV1321-4DC10](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RV1321-4DC10)

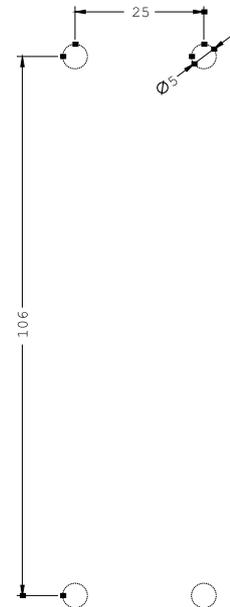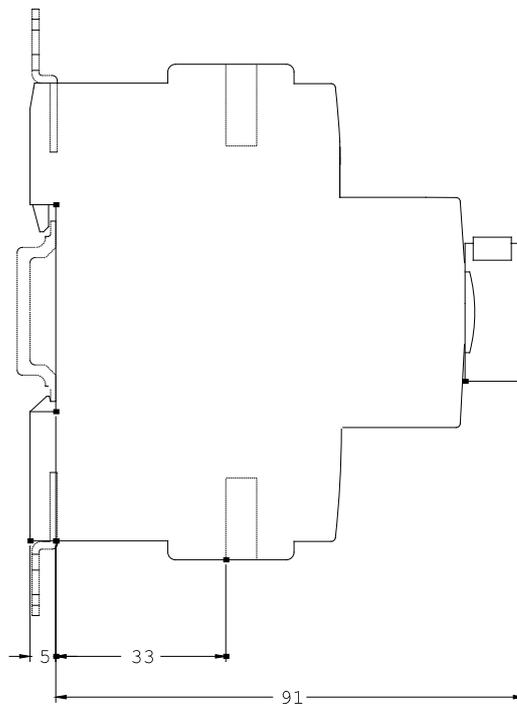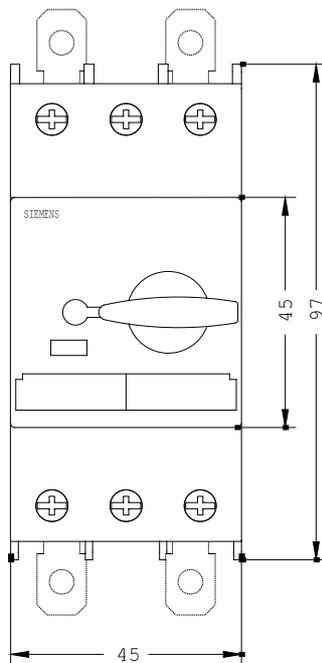

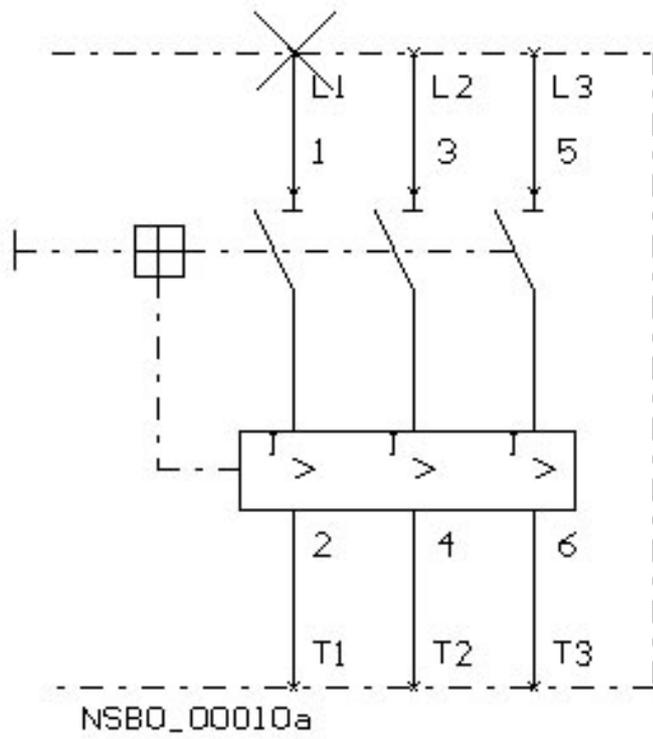

last change:

Feb 6, 2012